

DD 68224

# PROJECT SQUID

TECHNICAL REPORT PR-116-PU

## STRAND SIZE AND LOW PRESSURE DEFLAGRATION LIMIT IN A COMPOSITE PROPELLANT

BY

ROY E. COOKSON AND JOHN B. FENN  
PRINCETON UNIVERSITY

PROJECT SQUID HEADQUARTERS  
JET PROPULSION CENTER  
SCHOOL OF MECHANICAL ENGINEERING  
PURDUE UNIVERSITY  
LAFAYETTE, INDIANA

DDC  
RECEIVED  
FEB 12 1969  
B

Project SQUID is a cooperative program of basic research relating to Jet Propulsion. It is sponsored by the Office of Naval Research and is administered by Purdue University through Contract N00014-C7-A-0226-0005, NR-038-038.

DECEMBER 1968

This document has been approved  
for public release and sale; its  
distribution is unlimited

PR-116-PU

P R O J E C T S Q U I D

A COOPERATIVE PROGRAM OF FUNDAMENTAL RESEARCH  
AS RELATED TO JET PROPULSION  
OFFICE OF NAVAL RESEARCH, DEPARTMENT OF THE NAVY

Contract N00014-67-A-0226-0005, NR-098-038

STRAND SIZE AND LOW PRESSURE DEFLAGRATION LIMIT  
IN A COMPOSITE PROPELLANT

by

Roy E. Cookson\* and John B. Fenn\*\*  
Princeton University

PROJECT SQUID HEADQUARTERS  
JET PROPULSION CENTER  
SCHOOL OF MECHANICAL ENGINEERING  
PURDUE UNIVERSITY  
LAFAYETTE, INDIANA

December 1968

\*Present address: College of Aeronautics, Cranfield, England

\*\*Present address: Department of Engineering and Applied Science,  
Yale University

Reproduction, translation, publication, use and disposal in whole or in  
part by or for the United States Government is permitted.

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
	Abstract. . . . .	1
I	Introduction. . . . .	2
II	Experimental Apparatus Procedures . .	3
III	Results and Discussion. . . . .	5
	References. . . . .	9

### Abstract

The low pressure deflagration limit has been determined for a composite ammonium chlorate propellant over a range of pressures from 35 torr to 235 torr. The independent variable was strand size in terms of cross-section dimensions. A linear relation was found between the "hydraulic radius" of the strand and the low pressure limit. It was thus possible to extrapolate and determine the low pressure limit for a strand of infinite extent. At this limit it would seem that heat losses could only be by radiation from the surface.

## I. Introduction

Some time ago we attempted to examine the structure of the combustion zone above a strand of composite solid propellant by means of interferometry. In order to increase spatial resolution we expanded the zone by burning propellant strands at subatmospheric pressure in a chamber which could be continuously pumped and which was provided with windows for observation. For reasons which we probably should have anticipated we fell somewhat short of our primary objective. In the course of our experiments, however, we did obtain some data on the low pressure deflagration limit, LPDL, for two composite propellant compositions. In particular we determined the dependence of LPDL on strand size. It seems in order to record these results because they may provide some grist for the theorist's mills and shed some light on the nature of the combustion process mechanics.

The realization that LPDL depends upon strand size is not new. Sutherland noticed when he ignited wedge shaped strands of a composite propellant from the thick end that the point at which they extinguished depended upon the ambient pressure.(1) That is, the higher the pressure the thinner could be the web of the wedge at which combustion could be sustained. He did not present any quantitative details. More recently, Steinz and Summerfield report that the LPDL for one of their propellants was decreased by a factor of two when the strand size was increased in cross section from 0.25 to 0.6 in<sup>2</sup>.(2) In common with Sutherland these investigators explained this trend in terms of relative heat loss by convection and conduction to the ambient atmosphere. On the other hand, in their studies of the deflagration

of pure ammonium perchlorate strands Levy and Friedman indicate that the LPDL was independent of sample size.(3) Consequently, Johnson and Nachbar ascribed the important heat loss to radiation from the burning surface in their attempt at an exact treatment of the LPDL of ammonium perchlorate. (4) Most theoretical treatments of solid propellant combustion attribute the existence of an LPDL to the non-adiabaticity of real experimental systems. However, Barrere and Williams do suggest that mechanisms other than heat loss might be responsible.(5) Our results hint that alternatives to the heat loss explanation might well be contemplated.

## II. Experimental Apparatus Procedures

The main features of the apparatus are shown schematically in Fig. 1. The low pressure chamber comprised a standard six inch Pyrex Pipe cross (Corning). The open ends of the cross were closed by covers made of aluminum plate with O-ring seals between the plate and grooves ground into the Pyrex. Various leads for electrical, mechanical and gas connections were introduced through the cover plates which were also provided with plane windows for viewing and photography. Many features of the apparatus relate primarily to interferometry problems and will not be discussed here. The chamber was continuously exhausted by a mechanical rotary vane pump which had sufficient capacity to maintain the chamber pressure at any desired value from 40 to 200 torr with propellant strands up to one square inch in cross section. Control of the pressure was by means of a gate valve in the exhaust line between the pump and the chamber. It is noteworthy that at subatmospheric pressures the burning rate for most propellants is directly proportional to

the first power of the pressure. Thus, the volume flow of combustion gases is almost independent of pressure. Because the volumetric efficiency of the pump increases slightly with pressure there is an inherent stability in the pressure control loop. This is fortunate from the safety standpoint as well as for experimental convenience. We noted that with the large strands the increased heat release could lead to "uncomfortably" high temperatures in the chamber. In one case some soldered joints in the top cover were actually melted. Dousing with water was required to avoid failure. We strongly advise provision of effective cooling in future experiments of this sort, not only to preserve the integrity of the equipment but to prevent the increase in volume flow rate which would accompany high temperatures.

Ignition presented something of a problem because it was desirable to provide combustion initiation which was uniform across the strand surface. The most satisfactory method of the several tried was to lower onto the surface a section of nichrome strip wider than the propellant strand. Passing an electric current through the strip raised the temperature and resulted in fairly uniform ignition. In most cases the burning surface tended to level out during burning even though initiation was not uniform. In order to obtain the minimum burning pressure each sample was ignited at a pressure above the minimum value and the pressure was gradually decreased by opening the control valve until the strand ceased to burn. The process was repeated at least once for each strand size. It was found that the pressure had to be reduced fairly slowly in order to obtain reproducibility. Rapid reduction in pressure resulted in large variations in apparent extinguishing pressure. With care reproducibility was within a few per cent.

The propellant composition was essentially the same as that used by Silla in his measurements of burning velocity at low pressure.(6) The fuel-binder was P13 polyester resin. The oxidizer was ammonium perchlorate in one of two particle grinds: 25 microns or less and 80 microns or less. Measurements were made with compositions having either 78 or 80 per cent by weight of oxidizer. No inhibitor was used. The strands were rectangular in cross section. The long dimension was always one inch. The short dimension ranged from 1/16 to one inch.

### III. Results and Discussion

The raw experimental data are summarized in Fig. 2 which shows a plot of extinction pressure versus strand thickness. There is a clear functional dependence of LPDL on strand size. The hotter propellant (80% oxidizer) burns to a lower pressure than the cooler one for a given strand size. The two points for the finer grind 78% oxidizer composition indicate little dependence upon particle size in this range. There are too few data to draw firm conclusions on this point. The form of the curves indicates two asymptotes. In one limit there appears to be a minimum strand size below which combustion cannot obtain no matter what the pressure. This apparent limit probably is neither meaningful nor realistic because we know that the character of the combustion changes from a premixed to a diffusion flame mode as the pressure increases. Consequently, any conclusions drawn from extrapolation would have to be treated with great caution.

The other and more interesting asymptotic limit relates to the apparent possibility that there is a pressure below which steady state combustion will not occur no matter what the size of the strand. As we have already



indicated such a low pressure limit has been predicted by theoretical treatments for the case in which the system is not completely adiabatic, i.e. there is heat loss to the surroundings.(4,6) Such heat losses in the case of one dimensional strand models can generally be attributed to conductive and convective loss to the ambient gas and to radiant loss from surface as well as from the burned gases. It is to be expected that the relative heat losses due to convection and conduction and to radiation from the burned gas would depend upon the surface to volume ratio of the hot gas column rising from the burning surface. It is instructive, therefore, to recast the data in terms which will reflect this surface to volume ratio.

Fig. 3 shows a plot of the LPDL versus the ratio of strand perimeter to cross section area. This ratio is, of course, simply the "hydraulic radius" which has been very useful as a measure of wall effects in flow through conduits of various shapes. The data for each composition appears to fall on a straight line which is readily extrapolated. The abscissa intercept would seem to correspond to the LPDL for a strand of infinite cross section. In such a case the main heat loss should be by radiation from the surface. It is just this kind of heat loss which the theoretical treatments have contemplated. Unfortunately, it is not easy to relate the exact theories to our experimental situation. Our composite propellant is much more complex than the theoretical models and we cannot assign appropriate values to the important parameters. Moreover, it is not entirely clear to us that extrapolation to infinite cross section does not also

eliminate loss due to radiation from the surface. In a real limit of infinite cross section the surface would effect a net loss of heat by radiation only if it could "see" cool surroundings through an infinite depth of hot gas which is not entirely transparent. In fact, therefore, it would not see the surroundings. Thus, from the perspective of the surface the system might be adiabatic. If this is the case and if our extrapolation limit really corresponds to a burning surface of infinite area, we would have to seek an explanation for the LPDL of an infinite strand in some mechanism other than simple heat loss.

In light of this possibility it is instructive to look at burning rates in the low pressure range. In particular the results of Silla are relevant because he used a propellant which was essentially identical with our 80-20 composition.(6) Fig. 4 shows his results. The dashed line through the origin is equivalent to the line he drew through his points. The asterisk on the abscissa is the intercept value for the same propellant resulting from the extrapolation to infinite strand size in Fig. 3. It becomes inviting to draw the solid line shown in Fig. 4 as the extrapolation of burning rate data to the vanishing point. Clearly, the intercept is the same for both extrapolations. It is noteworthy that for the strand size used by Silla (0.25 x 0.25 in) the pressures at which he made measurements are quite far to the right of the corresponding curve in Fig. 3. Thus, they may be considered free of heat loss effects. This consideration is confirmed by the absence of any downward curvature in the solid line of Fig. 4.


Of course, strands of the size that Silla used will show a vanishing burning rate at pressures much higher than the "possibly adiabatic" limit

shown by the asterisk on Fig. 4. We can estimate from Fig. 3 at what pressure this should occur for a 0.25 x 0.25 inch strand. The result is shown by the triangle on the abscissa of Fig. 4. The dotted curve represents a guess as to what the intermediate burning rate-pressure relation might be.

In sum, the extrapolation of Silla's burning rate data to zero velocity and the extrapolation of our LPDL data to infinite strand size both lead to the same finite positive value of pressure at which the burning rate vanishes. Because it can be argued that both limits relate to adiabatic behaviour the possibility materializes that heat losses may not be the only cause of LPDL's. We would be the first to insist that the available data comprise far too shaky a foundation to support firmly such an intriguing conclusion. Nevertheless, they at least invite further investigation and analysis.

### References

1. G. S. Sutherland, Ph.D. Thesis, Princeton, 1956.
2. J. A. Steinz and M. Summerfield, presented at 153rd meeting of American Chemical Society, Miami, April 1967. To be published in Advances in Chemistry series.
3. J. B. Levy and R. Friedman, Eighth Symposium (International) on Combustion, 663, Williams and Wilkins, Baltimore, 1962.
4. W. E. Johnson and W. Nachbar, ibid., 678.
5. M. Barrere and F. A. Williams, presented at 25th Meeting AGARD Combustion and Propulsion Panel, "Advances in Tactical Rocket Propulsion," San Diego, 1965.
6. H. Silla, ARS J. 31, 1277 (1961).
7. D. B. Spalding, Combustion and Flame 4, 59 (1960).

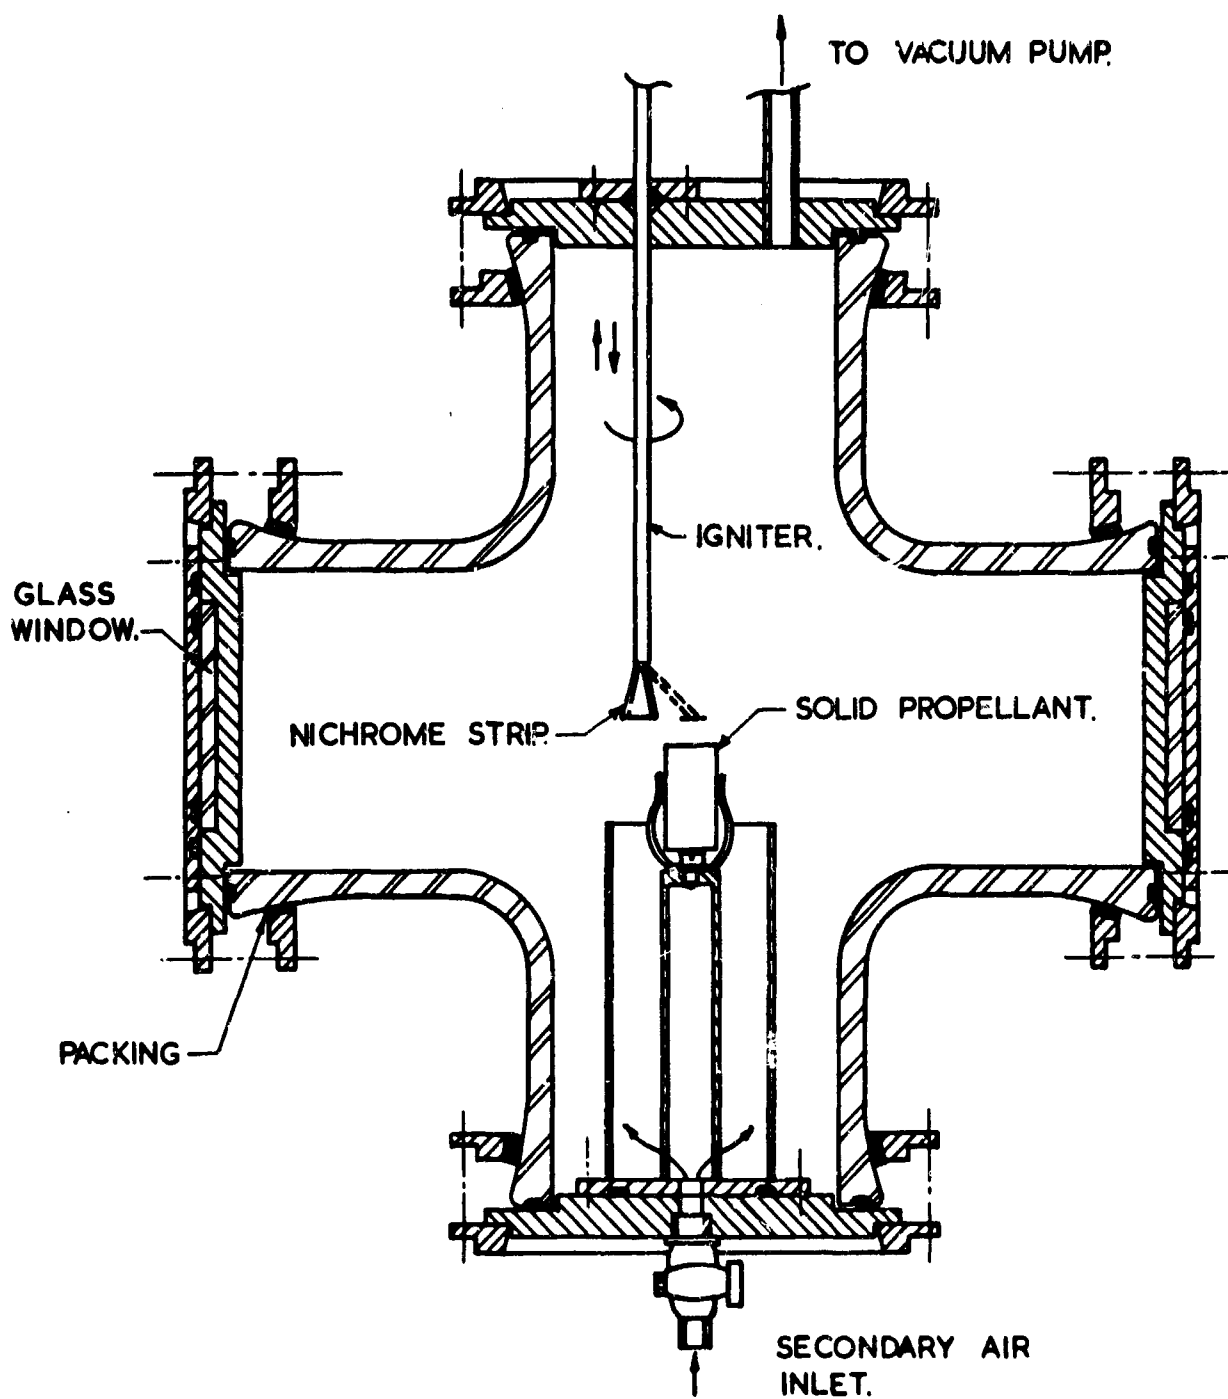

LOW PRESSURE TEST VESSEL.

FIG. 1

VARIATION OF MINIMUM COMPOSITE PROPELLANT STRAND DIMENSION  
WITH EXTINGUISHING PRESSURE.

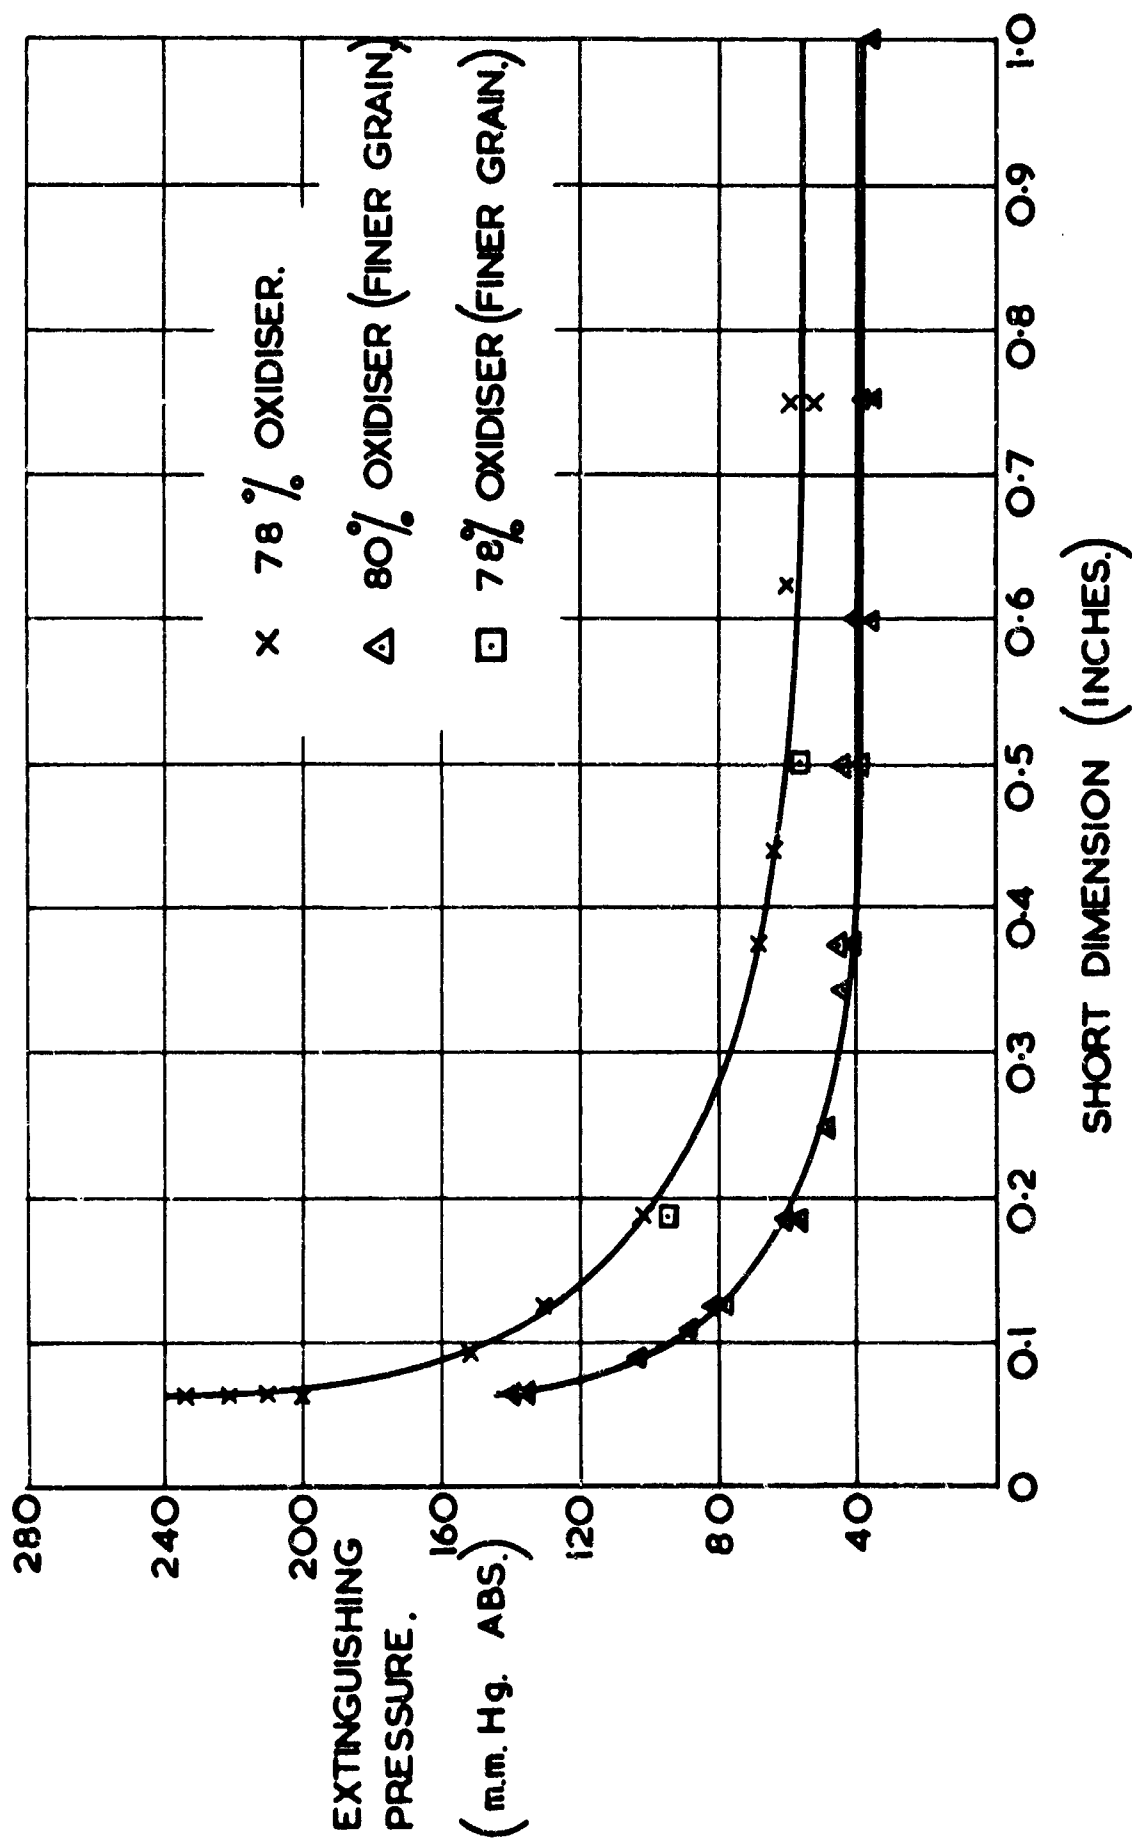


FIG. 2

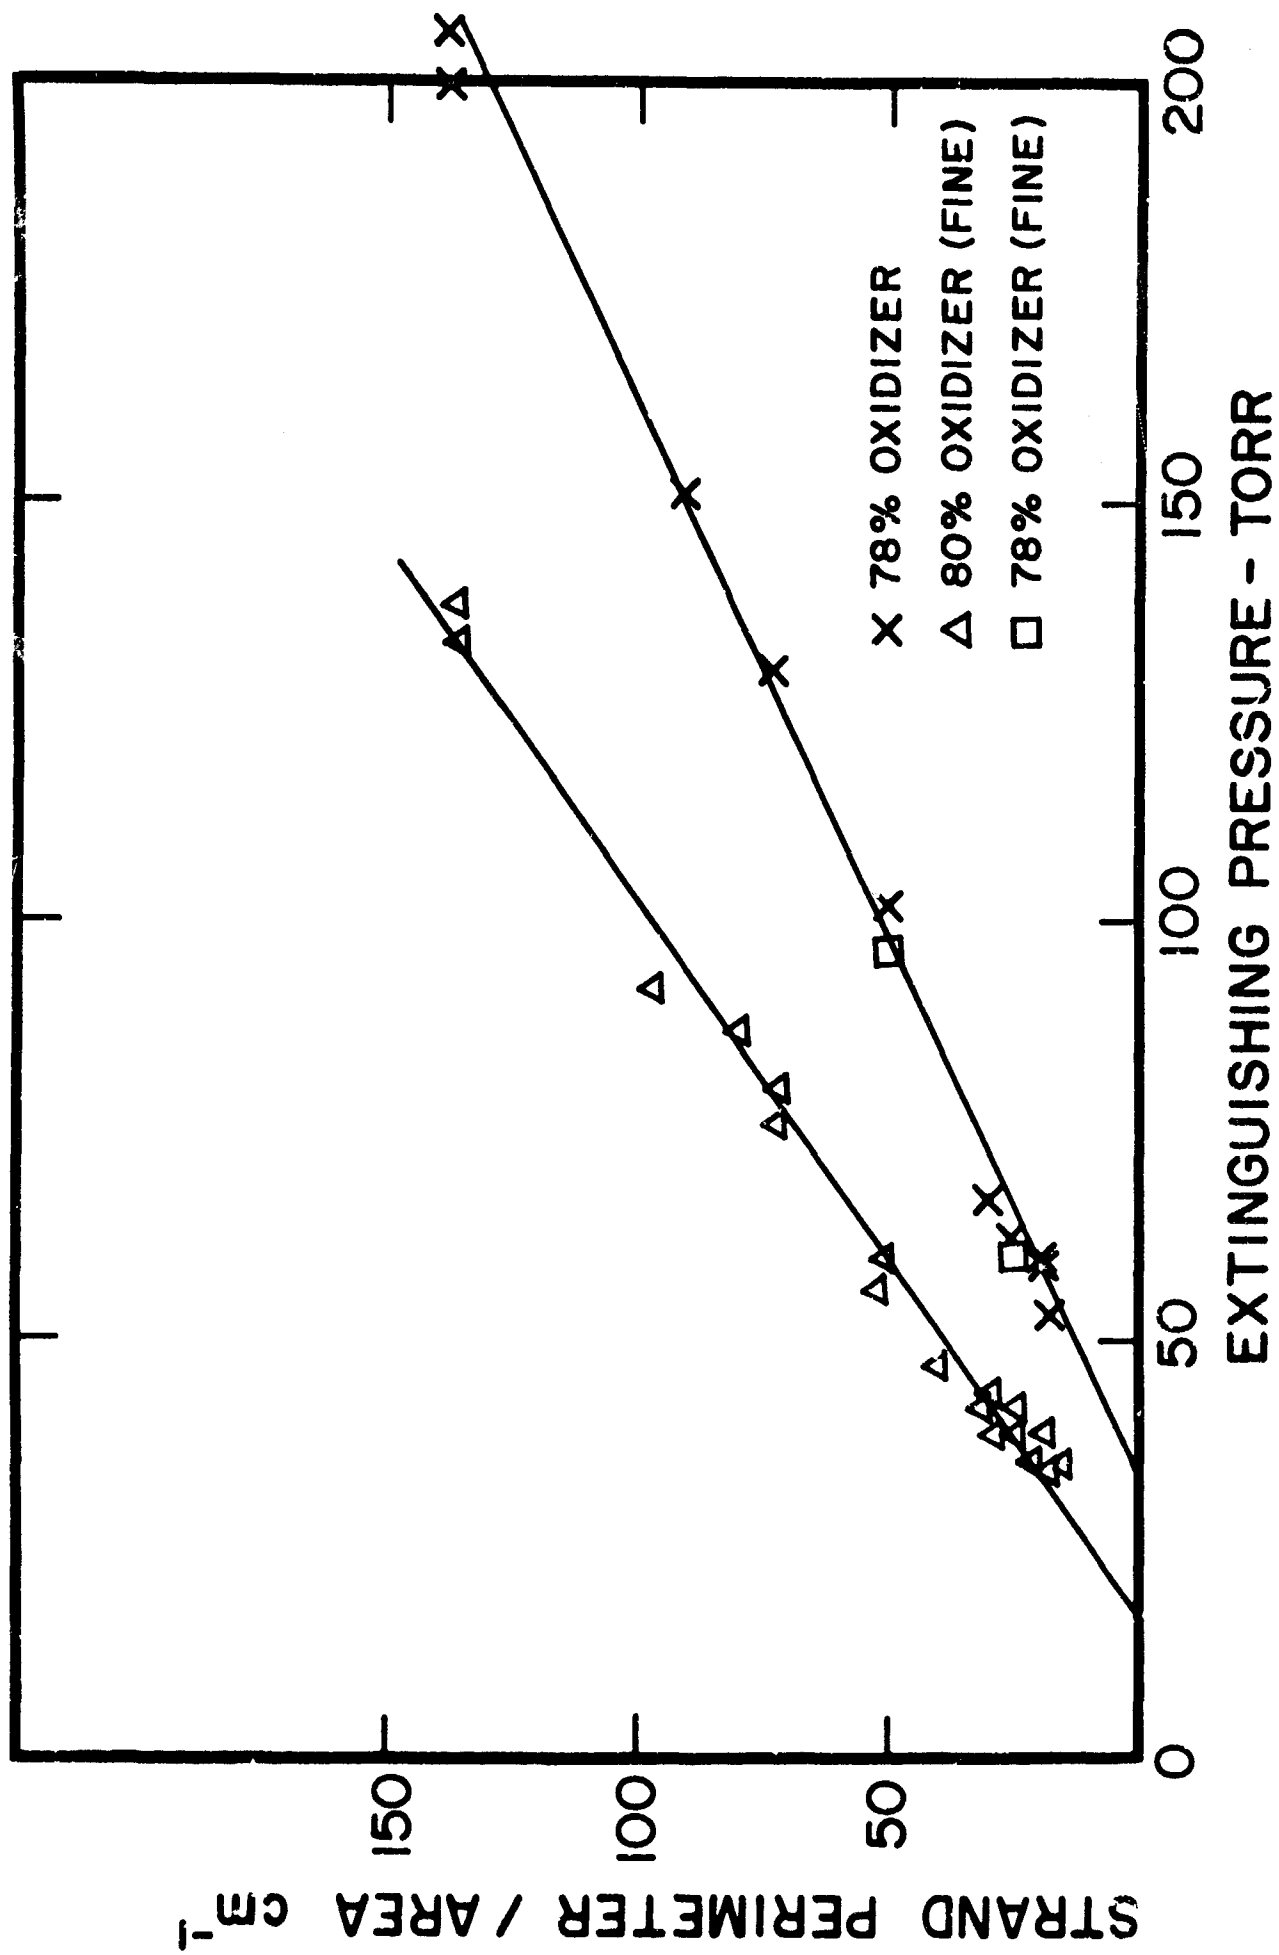


FIG. 3

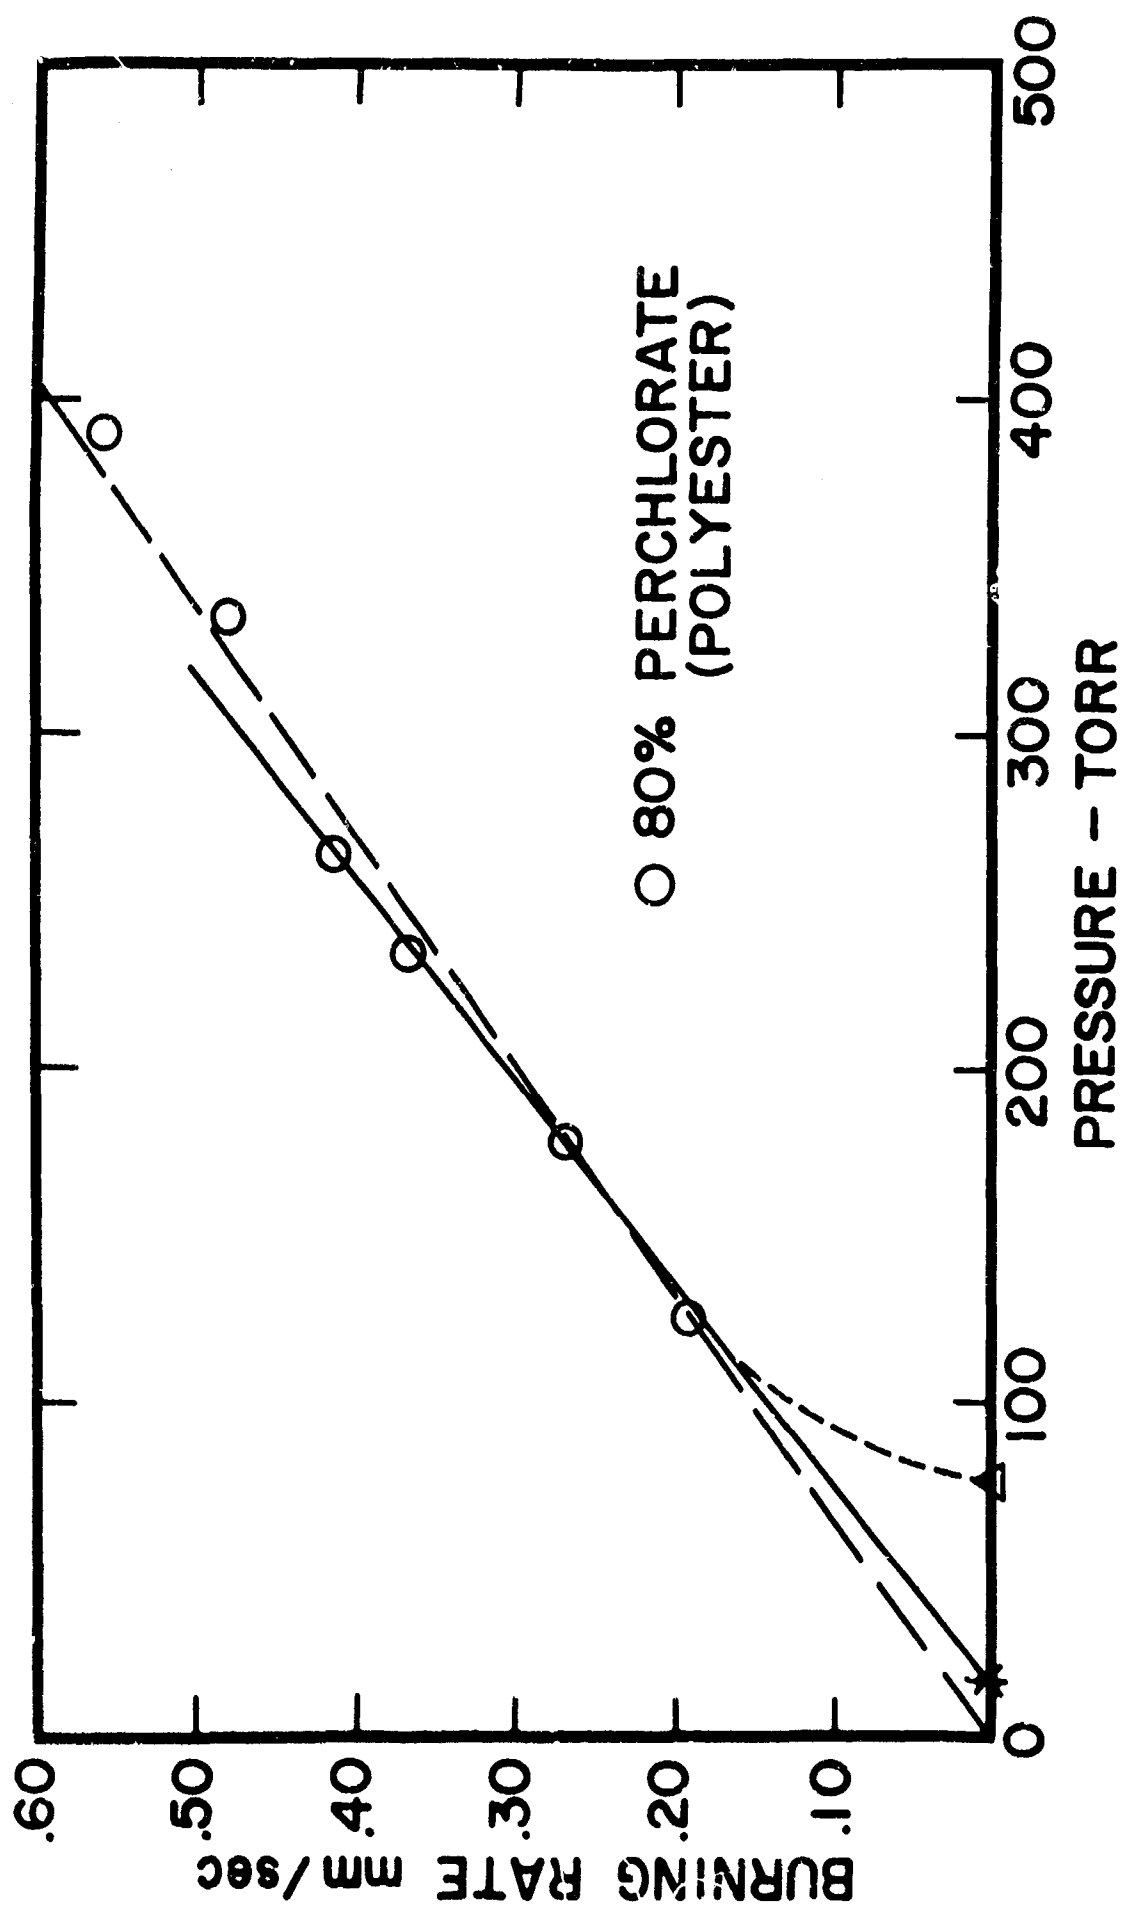


FIG. 4



UNCLASSIFIED

Security Classification

## DOCUMENT CONTROL DATA - R &amp; D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) <b>Project SQUID Jet Propulsion Center, School of Mechanical Eng'g Purdue University, Lafayette, Indiana 47907</b>		2a. REPORT SECURITY CLASSIFICATION <b>UNCLASSIFIED</b>	
		2b. GROUP <b>N/A</b>	
3. REPORT TITLE <b>STRAND SIZE AND LOW PRESSURE DEFLAGRATION LIMIT IN A COMPOSITE PROPELLANT</b>			
4. DESCRIPTIVE NOTES (Type of report and, inclusive dates) <b>N/A</b>			
5. AUTHOR(S) (First name, middle initial, last name) <b>Roy E. Cookson and John B. Fenn</b>			
6. REPORT DATE <b>December 1968</b>		7a. TOTAL NO. OF PAGES <b>12</b>	7b. NO. OF REFS <b>7</b>
8a. CONTRACT OR GRANT NO. <b>N00014-67-A-0226-0005</b>		9a. ORIGINATOR'S REPORT NUMBER(S) <b>PR-116-PU</b>	
b. PROJECT NO. <b>NR-098-038</b>			
c. <b></b>		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d. <b></b>			
10. DISTRIBUTION STATEMENT  <b>Qualified requesters may obtain copies of this report from DDC.</b>			
11. SUPPLEMENTARY NOTES <b>N/A</b>		12. SPONSORING MILITARY ACTIVITY <b>Office of Naval Research Power Branch, Code 429 Department of the Navy, Washington, D.C. 20360</b>	
13. ABSTRACT <p>The low pressure deflagration limit has been determined for a composite ammonium chlorate propellant over a range of pressures from 35 torr to 235 torr. The independent variable was strand size in terms of cross-section dimensions. A linear relation was found between the "hydraulic radius" of the strand and the low pressure limit. It was thus possible to extrapolate and determine the low pressure limit for a strand of infinite extent. At this limit it would seem that heat losses could only be by radiation from the surface.</p>			

DD FORM 1473 (PAGE 1)

N N 0101-807-0811

UNCLASSIFIED

Security Classification

4-7140A

**Security Classification**

14

#### KEY WORDS

LINK A

LINK @

LINK C

	ROLE
Chairman	Mr. J. Edgar Hoover
Vice Chairman	Mr. Clegg
Members	Mr. Glavin Mr. Ladd Mr. Nichols Mr. Rosen Mr. Tracy Mr. Carson Mr. Egan Mr. Gurnea Mr. Hendon Mr. Pennington Mr. Quinn Tamm Mr. Nease Mr. Mohr Mr. Winterrowd Miss Gandy

WT

NAME	ROLE
1. [Name]	[Role]
2. [Name]	[Role]
3. [Name]	[Role]
4. [Name]	[Role]
5. [Name]	[Role]
6. [Name]	[Role]
7. [Name]	[Role]
8. [Name]	[Role]
9. [Name]	[Role]
10. [Name]	[Role]
11. [Name]	[Role]
12. [Name]	[Role]
13. [Name]	[Role]
14. [Name]	[Role]
15. [Name]	[Role]
16. [Name]	[Role]
17. [Name]	[Role]
18. [Name]	[Role]
19. [Name]	[Role]
20. [Name]	[Role]
21. [Name]	[Role]
22. [Name]	[Role]
23. [Name]	[Role]
24. [Name]	[Role]
25. [Name]	[Role]
26. [Name]	[Role]
27. [Name]	[Role]
28. [Name]	[Role]
29. [Name]	[Role]
30. [Name]	[Role]
31. [Name]	[Role]
32. [Name]	[Role]
33. [Name]	[Role]
34. [Name]	[Role]
35. [Name]	[Role]
36. [Name]	[Role]
37. [Name]	[Role]
38. [Name]	[Role]
39. [Name]	[Role]
40. [Name]	[Role]
41. [Name]	[Role]
42. [Name]	[Role]
43. [Name]	[Role]
44. [Name]	[Role]
45. [Name]	[Role]
46. [Name]	[Role]
47. [Name]	[Role]
48. [Name]	[Role]
49. [Name]	[Role]
50. [Name]	[Role]
51. [Name]	[Role]
52. [Name]	[Role]
53. [Name]	[Role]
54. [Name]	[Role]
55. [Name]	[Role]
56. [Name]	[Role]
57. [Name]	[Role]
58. [Name]	[Role]
59. [Name]	[Role]
60. [Name]	[Role]
61. [Name]	[Role]
62. [Name]	[Role]
63. [Name]	[Role]
64. [Name]	[Role]
65. [Name]	[Role]
66. [Name]	[Role]
67. [Name]	[Role]
68. [Name]	[Role]
69. [Name]	[Role]
70. [Name]	[Role]
71. [Name]	[Role]
72. [Name]	[Role]
73. [Name]	[Role]
74. [Name]	[Role]
75. [Name]	[Role]
76. [Name]	[Role]
77. [Name]	[Role]
78. [Name]	[Role]
79. [Name]	[Role]
80. [Name]	[Role]
81. [Name]	[Role]
82. [Name]	[Role]
83. [Name]	[Role]
84. [Name]	[Role]
85. [Name]	[Role]
86. [Name]	[Role]
87. [Name]	[Role]
88. [Name]	[Role]
89. [Name]	[Role]
90. [Name]	[Role]
91. [Name]	[Role]
92. [Name]	[Role]
93. [Name]	[Role]
94. [Name]	[Role]
95. [Name]	[Role]
96. [Name]	[Role]
97. [Name]	[Role]
98. [Name]	[Role]
99. [Name]	[Role]
100. [Name]	[Role]

WT

NAME	ROLE
Mr. J. Edgar Hoover	Director
Mr. Clegg	Chief Clerk
Mr. Glavin	Chief of Bureau
Mr. Ladd	Chief of Bureau
Mr. Nichols	Chief of Bureau
Mr. Rosen	Chief of Bureau
Mr. Tracy	Chief of Bureau
Mr. Carson	Chief of Bureau
Mr. Egan	Chief of Bureau
Mr. Gurnea	Chief of Bureau
Mr. Hendon	Chief of Bureau
Mr. Pennington	Chief of Bureau
Mr. Quinn	Chief of Bureau
Mr. Nease	Chief of Bureau
Mr. Gandy	Chief of Bureau

WT

hydraulic radius